

TOWN OF LADY LAKE

DRIVEWAY PERMIT APPLICATION

Date: _____ Name of Applicant: _____


Job Address: _____

Subdivision: _____ Lot #: _____

WARNING: CONTRACTOR MUST CALL FOR AN APRON FOOTING INSPECTION PRIOR TO
POURING CONCRETE

Residential Driveway Apron- Required Specifications

- 6" lime rock base, 98% compaction with 1" asphalt type III or 6" – 2500 PSI concrete reinforced with 6 X 6 wire mesh or fiber mesh to extend from 1' within the property line to the edge of the road.
- Standard aprons must have a minimum width of 10' and a maximum width of 24'.
- A minimum of a 4' radius is required at the flair.
- Depending upon roadside drainage, a culvert may be required. (Minimum size- 15" diameter)
- Circular driveways must be a minimum of 18' wide and 1' 6" past property line.

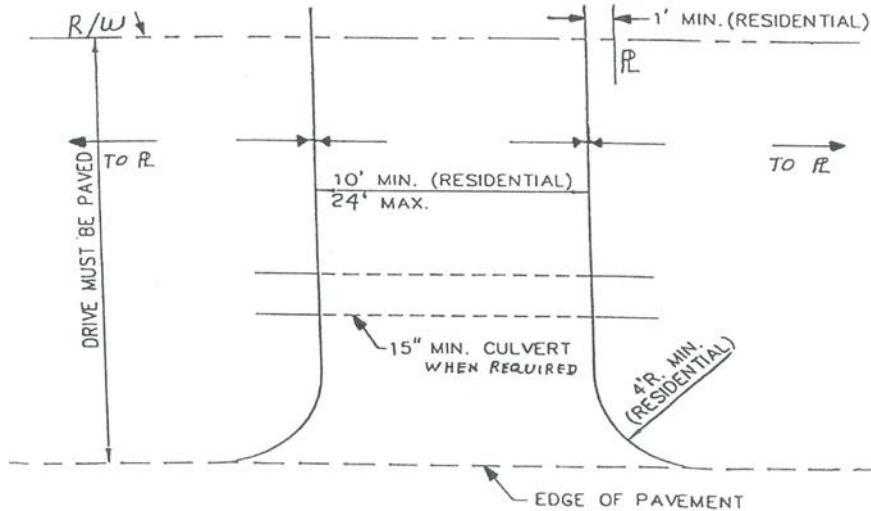

(OWNER OR APPLICANT'S SIGNATURE)

Applicant shall construct driveway in accordance with the town of lady lake regulations and by the requirements shown on the sketch above before final inspection by the building inspector. Applicant will hold the Town of Lady Lake harmless from all damages, claims or injuries which may result from such work.